

**MARKINGS ON SQUARE SOCKET PUNCHES**


ORDER PUNCHES PER MARKING			
1st Number HEAD SIZE	1st Letter HEAD STYLE	2nd Number RECESS SIZE	3rd Number PUNCH DIAMETER
2  THRU  3/8	*F=FLAT	00	7=7/16
	R=ROUND	0 or 0S	9=9/16
	O=OVAL	1 or 1S	12=3/4
	P=PAN	2 or 2S	14=7/8
	T=TRUSS	3 or 3S	16=1"
	PH=FILLISTER	4 or 4S	20=1-1/4
	W=WASHER		

EXAMPLES:

- #1 F29=FLAT HEAD, #2 RECESS ON 9/16 BLANK
- #2 8P29=#8 PAN HEAD, #2 RECESS ON 9/16 BLANK
- #3 10T214=#10 TRUSS HEAD, #2 RECESS ON 7/8 BLANK

NOTE: "S" added to recess number indicates short.

\*Flat heads only will have no head size markings.

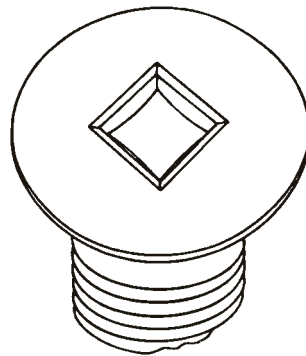

**WARNING**

Any heading punch may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.


**SQUARE SOCKET TYPE**

SCREW SIZE	HEAD SIZE	PUNCH NUMBERS			
		OVAL HEAD	ROUND HEAD	PAN HEAD	TRUSS HEAD
2	F007	2O007	2R007	2P007	2T007
3	F07	3O07	3R07	3P07	3T07
4	F07	4O07	4R07	4P07	4T07
5	F1S7	5O17	5R17	5P17	5T1S7
6	F1S7	6O17	6R17	6P17	6T1S7
7	F17	7O17	7R19	7P19	7T1S9
8	F2S9	8O29	8R29	8P29	8T2S9
9	F29	9O29	9R29	9P29	9T2S9
10	F29	10O29	10R29	10P29	10T2S9
12	F314	12O314	12R314	12P314	12T3S14
14	F314	14O314	14R314	14P314	14T3S14
1/4	F314	1/4O314	1/4R314	1/4P314	1/4T3S14
5/16	F416	5/16O416	5/16R416	5/16P416	5/16T416
3/8	F416	3/8O416	3/8R416	3/8P416	3/8T416

Use Oval Type for Fillister Type Screws.

Use Round Type for Washer Type Screws.

Add "COMB" to the part number when ordering square and slot combinations.

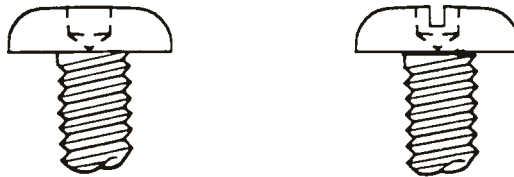

**WARNING**

Any heading punch may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.