

MARKINGS ON SQUARE SOCKET PUNCHES


ORDER PUNCHES PER MARKING			
1st Number HEAD SIZE	1st Letter HEAD STYLE	2nd Number RECESS SIZE	3rd Number PUNCH DIAMETER
2 THRU 3/8	*F=FLAT	00	7=7/16
	R=ROUND	0 or 0S	9=9/16
	O=OVAL	1 or 1S	12=3/4
	P=PAN	2 or 2S	14=7/8
	T=TRUSS	3 or 3S	16=1"
	PH=FILLISTER	4 or 4S	20=1-1/4
	W=WASHER		

EXAMPLES:

- #1 F29=FLAT HEAD, #2 RECESS ON 9/16 BLANK
- #2 8P29=#8 PAN HEAD, #2 RECESS ON 9/16 BLANK
- #3 10T214=#10 TRUSS HEAD, #2 RECESS ON 7/8 BLANK

NOTE: "S" added to recess number indicates short.

*Flat heads only will have no head size markings.

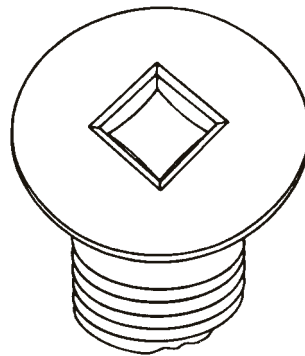

WARNING

Any heading punch may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.


SQUARE SOCKET TYPE

SCREW SIZE	HEAD SIZE	PUNCH NUMBERS			
		OVAL HEAD	ROUND HEAD	PAN HEAD	TRUSS HEAD
2	F007	2O007	2R007	2P007	2T007
3	F07	3O07	3R07	3P07	3T07
4	F07	4O07	4R07	4P07	4T07
5	F1S7	5O17	5R17	5P17	5T1S7
6	F1S7	6O17	6R17	6P17	6T1S7
7	F17	7O17	7R19	7P19	7T1S9
8	F2S9	8O29	8R29	8P29	8T2S9
9	F29	9O29	9R29	9P29	9T2S9
10	F29	10O29	10R29	10P29	10T2S9
12	F314	12O314	12R314	12P314	12T3S14
14	F314	14O314	14R314	14P314	14T3S14
1/4	F314	1/4O314	1/4R314	1/4P314	1/4T3S14
5/16	F416	5/16O416	5/16R416	5/16P416	5/16T416
3/8	F416	3/8O416	3/8R416	3/8P416	3/8T416

Use Oval Type for Fillister Type Screws.

Use Round Type for Washer Type Screws.

Add "COMB" to the part number when ordering square and slot combinations.

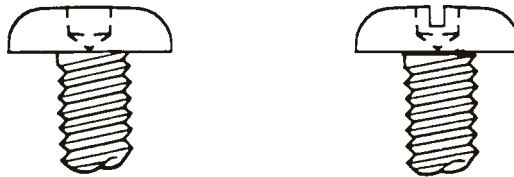

WARNING

Any heading punch may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.