


**PHILLIPS INDENTED HEXAGON PINS**

**STANDARD INDENTED PHILLIPS HEXAGON PINS**

SCREW SIZE	HEX SIZE A/F	PIN NUMBER	A/F	B	C	D	E	L WTP STD	OPTIONAL L	PUNCH PEN.
			+0.000 -0.001	+0.005 -0.000	+0.002 -0.000	+0.000 -0.001	+0.015 -0.000			+0.000 -0.012
4	3/16	3P10-41IHP 520	0.179	0.153	0.006	0.311	0.562	1.250	2.500	0.057/0.065
5	3/16	3P10-42IHP 520	0.179	0.153	0.006	0.311	0.562	1.250	2.500	0.065/0.073
6	1/4	3P20-1IHP 520	0.242	0.210	0.012	0.311	0.562	1.250	2.500	0.089
8	1/4	3P20-2IHP 520	0.242	0.210	0.018	0.311	0.562	1.250	2.500	0.115
8	1/4	3P20-2IHP 620	0.242	0.210	0.018	0.374	0.562	1.250	2.500	0.115
10	5/16	3P20-6IHP 620	0.302	0.270	0.020	0.374	0.562	1.250	2.500	0.125
1/4	3/8	3P30-3IHP 820	0.364	0.320	0.030	0.499	0.625	1.250	2.500	0.186
1/4	7/16	3P30-3(7)IHP 820	0.425	0.381	0.030	0.499	0.625	1.250	2.562	0.186

**METRIC PHILLIPS TYPE INDENTED HEXAGON PINS**

HEXAGON SIZE A/F MM	PIN NUMBER	A/F	B	C	D	E	L WTP STD	OPTIONAL L	PUNCH PEN.
		+0.000 -0.001	+0.005 -0.000	+0.002 -0.000	+0.000 -0.001	+0.015 -0.000			+0.000 -0.012
4	M4IHP-3P10-1 520	0.150	0.125	0.016	0.311	0.500	1.250	2.500	0.066/0.074
5.5	M5.5IHP-3P20-1 520	0.209	0.182	0.019	0.311	0.562	1.250	2.500	0.096
6	M6IHP-3P20-2 520	0.228	0.198	0.019	0.311	0.562	1.250	2.500	0.116
7	M7IHP-3P20-6 620	0.265	0.232	0.022	0.374	0.562	1.250	2.500	0.125
8	M8IHP-3P20-3 620	0.305	0.268	0.027	0.374	0.562	1.250	2.500	0.139

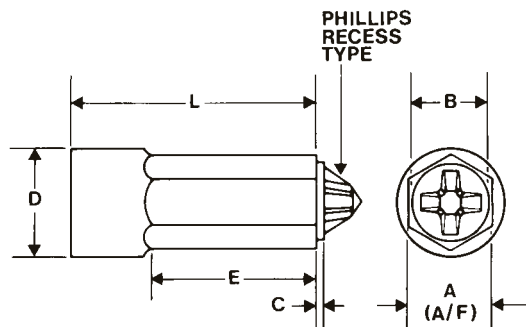

**NOTE:** Please specify length of pin when ordering.

**WARNING**

Any heading punch may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.